


PACKAGES ALIGNER

MODELS: AD-470 1D / AD-470 2D / AD-470 3D / AD-470 4D
VERSION WITH SPACER / VERSION WITHOUT SPACER

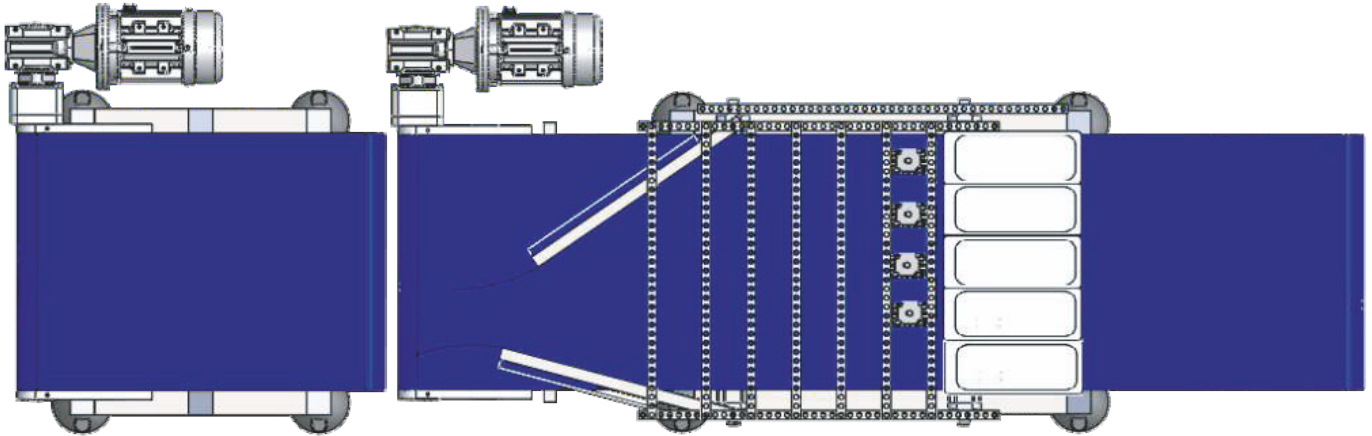

TECHNICAL DATA

Machine dimensions/mm	According to design
Adjustable working height	800-1000 mm. approx.
Approximate weight	70 Kg.
Belt width	According to design
Conveyor speed	Adjustable

FEATURES

- Stainless steel frame AISI 304
- Hygienic Design
- Food-use plastic conveyor
- Adaptable to any trademark of traysealers or thermoformer

DOCUMENTS

- Certificate CE
- Declaration of Conformity CE
- Operator technical Manual
- Parts list

GENERAL SUPPLY

ELECTRICITY GRID

- Voltage 380/400/440/460 V
 - Phases No. 3+N+ground
 - Frequency 50/60 Hz.
- Power 0,5 KW

- Voltage 220/230 V THREE-PHASE
 - 3 PHASES+ground
 - Frequency 50/60 Hz.
- Power 0,5 KW

- Voltage 220/230 V SINGLE PHASE
 - 2 PHASES+ground
 - Frequency 50/60 Hz.
- Power 0,5 KW

COMPRESSED AIR NETWORK

- 1/2 inch piping
- Pressure of 6-8 bars
- Consumption 50 litres/minute