


# TRAYSEALER MODEL MAXI

SEALING




VACUUM



GAS-MAP



MOULD 1/2 GN



MOULD 1/4 GN



MOULD 1/8 GN




OPTION  
SILENT COMPRESSOR




OPTION:  
OXYGEN PUMP



OPTION:  
UPWINDER



STANDARD



OPTION






MAX.  
460 mm

MAX.  
300 mm

FILM LID

470 mm

## CUTTING BLADE MEASURES

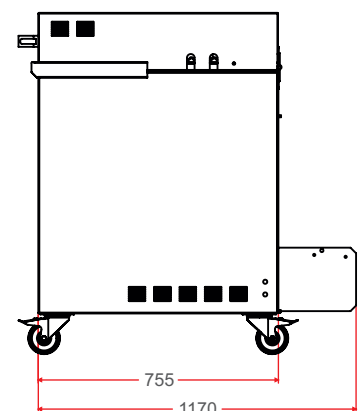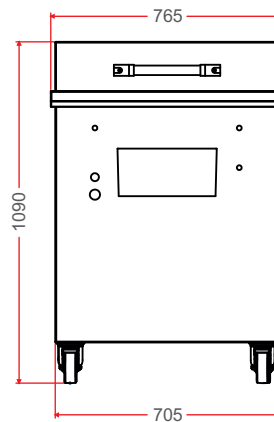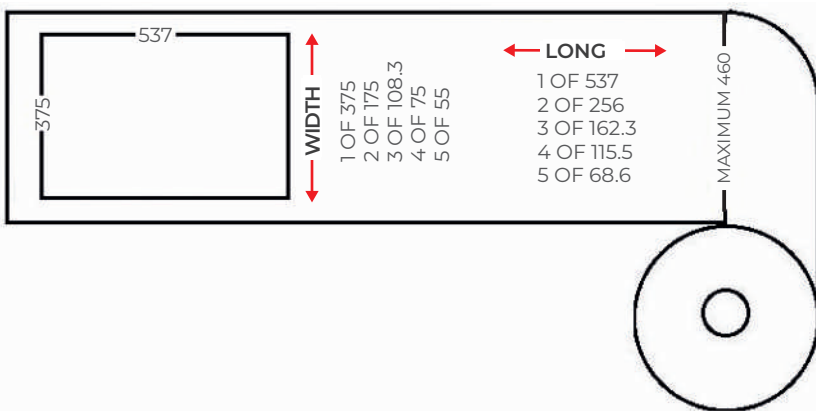

## FEATURES:

- Structure in stainless steel AISI 304.
- Touchscreen with 25 programs to be accommodated to different products.
- Vacuum by millibars and time, or both.
- Gas injection by millibars and time over gas.
- Temperature control probe.
- Manual lowering of the hood.
- Busch vacuum pump 25 m<sup>3</sup>/h.

- Capacity for 11 GN tray.
- Capacity for 2 1/2 GN trays.
- Capacity for 4 trays 1/4 GN.
- Capacity for 6 trays 1/6 GN.
- Capacity for 8 trays 1/8 GN.
- Or the model chosen by the customer.
- Film width: 430 mm.

- Cutting of the trays independently.
- Three phases 380v. 3P+N+T
- Power 5000 W.
- Approx. performance 80 cycles/h. (Including loading and unloading time).
- Connected to the compressed air network.
- Compressed air consumption: 290 liters/minute/6 bars of pressure.